

linear connection  
using  
180° bars




90° angle  
connection using  
90° bars



$\varphi^\circ$  angle  
conecion using  
 $\varphi^\circ$  bars



When segments of the Ubase mount must be interconnected to create a uniform continuous railing, either on a straight line or at an angle, depending on the construction's needs, metal bars are used which are anchored onto the mount's dents on both segments. It is recommended that three are used for every connection, for an absolutely secured result.

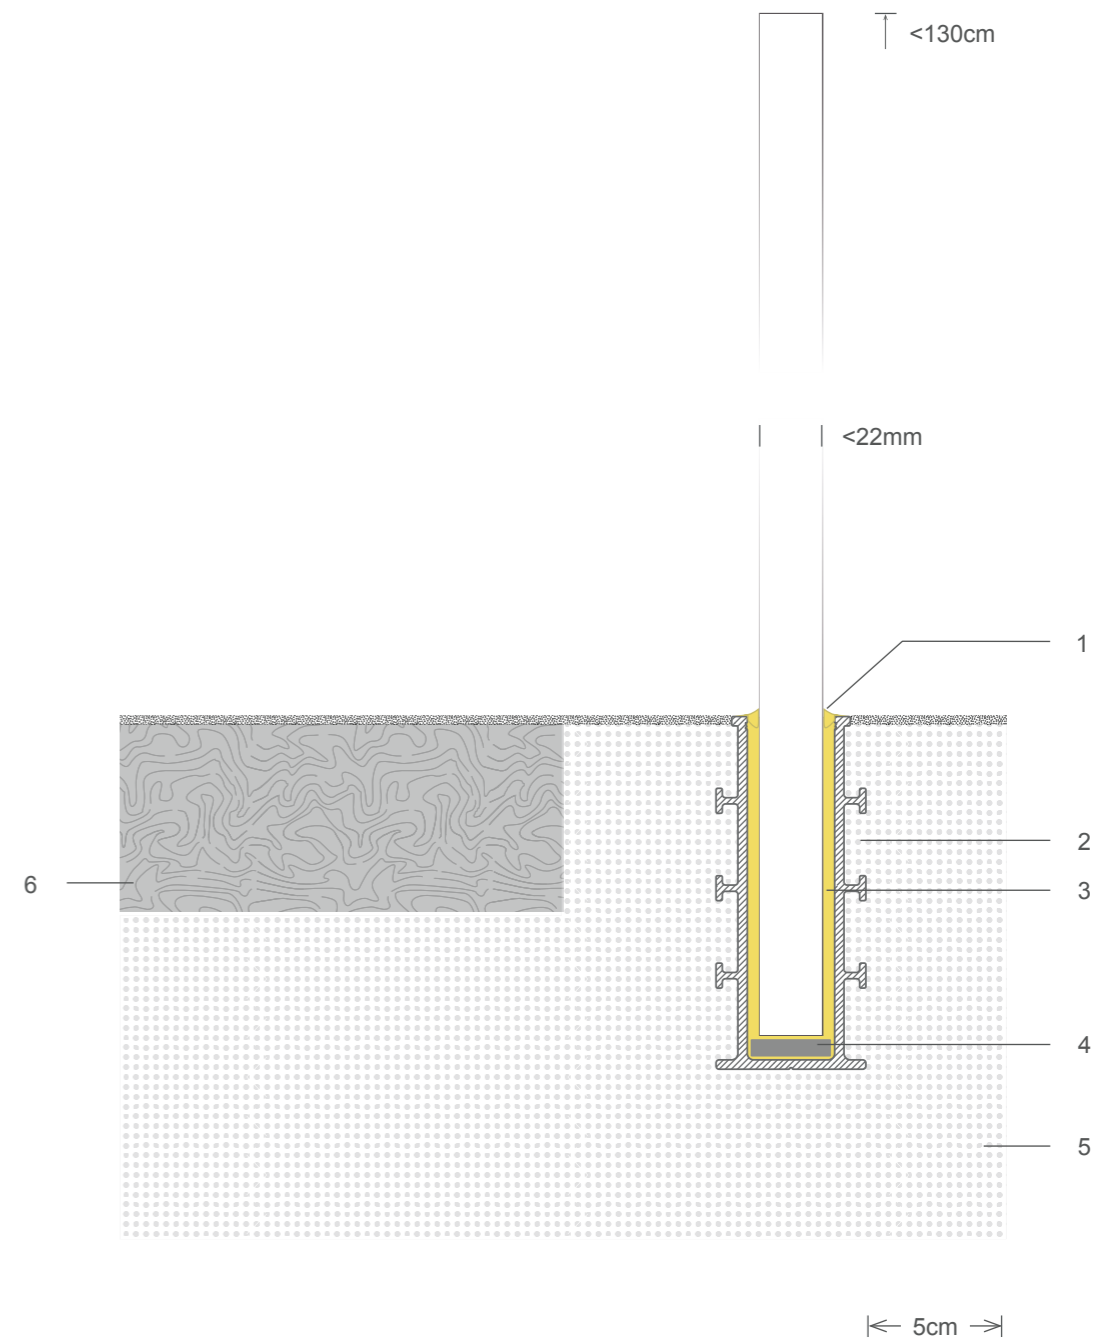

- 1 watertightness with silicon
- 2 anchoring points
- 3 elastomeric resin
- 4 plastic cap
- 5 reinforced concrete
- 6 mortar